


CONVENTIONAL PLOUGH

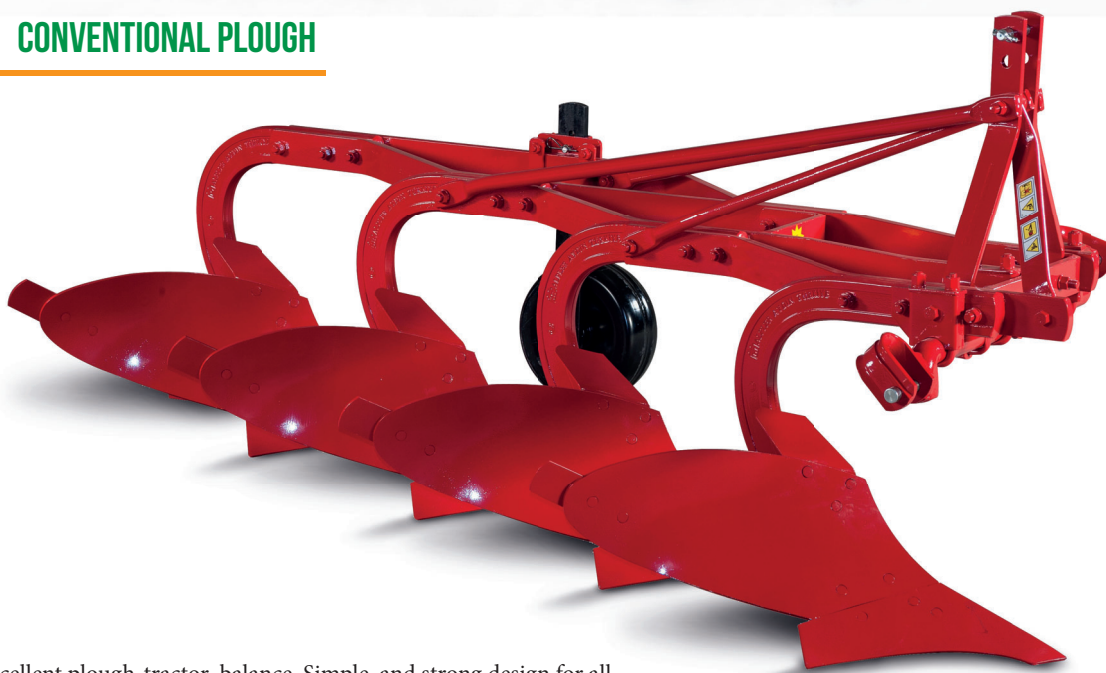

Excellent plough-tractor balance. Simple and strong design for all land conditions. Big variety of working width choice for all tractor horse powers.

Model	Clearance (cm)	Distance Between Furrows (cm)	Working Width (cm)	Working Depth (cm)	WEIGHT (KG)						REQUIRED POWER (HP)					
					1 FURROW	2 FURROWS	3 FURROWS	4 FURROWS	5 FURROWS	6 FURROWS	1 FURROW	2 FURROWS	3 FURROWS	4 FURROWS	5 FURROWS	6 FURROWS
AG-MP 08	61	60	23,5	20	118	165	232	348	440	520	20-25	20-25	30-40	40-50	50-60	65-75
AG-MP 10	68	70	25,5	24	175	215	320	493	620	760	25-30	30-40	45-50	70-80	80-90	80-90
AG-MP 12	68	76	30	26	177	226	341	523	654	800	30-35	40-50	55-60	70-85	90-100	95-115
AG-MP 14	68	78	35	28	177	244	360	547	680	830	35-40	40-50	60-70	80-90	90-100	110-125
AG-MP 16	68	81	37,5	30	204	272	417	619	803	916	40-45	60-70	70-80	80-90	100-110	125-135
AG-MP 18	68	84	40	32	220	308	485	715	890	962	45-50	70-80	80-90	90-100	100-120	135-150